



GV CUP PACKER

5" X 2-3/8"

Manual No:
DL-439-5000-922

Revision: **A**

Revision Date:
10/09/2015

Authored by: *J.Anderson*

Approved by: *C.Colvin*

A) DESCRIPTION

The Type GV Cup Packer is an economical means of isolating casing leaks and depleted zones and is also a production or injection packer for low pressure applications. Depending on application, this packer can be run with cups opposed or in the same direction. This packer is also available with packing element back-up rings for higher pressure applications and comes in a full range of tubing and casing sizes in two-cup or four-cup models.

B) SPECIFICATION GUIDE

CASING			TOOL		THREAD CONNECTION BOX UP / PIN DOWN	PART NUMBER
SIZE (INCHES)	WEIGHT (LBS/FT)	RECOMMENDED HOLE SIZE (INCHES)	GAGE OD (INCHES)	NOMINAL ID (INCHES)		
5	13.0 – 15.0	4.408 – 4.494	4.250	2.00	2-3/8 EUE	43951 43951H ¹ 43951V ²
	18.0	4.276	4.125	2.00	2-3/8 EUE	43950 43950H ¹ 43950V ²

Elastomer Trim Options: ¹HSN, ²Viton

DIFFERENTIAL PRESSURE (MAX)	TENSILE LOAD THRU TOOL (MAX)	RECOMMENDED RUNNING DEPTH (MAX)	RECOMMENDED RUNNING SPEED (MAX)
7,500 PSI	63,500 LBS	7,000 FT	60 FT/MIN

C) PRE-INSTALLATION INSPECTION PROCEDURES

CAUTION₁: D&L ships tool connections made-up **HAND TIGHT**—labeled with hand-tight tape on the tool (Fig. 1)—unless stated otherwise. Tighten/torque all connections properly before operating tool.



Fig. 1

GENERAL THREAD CONNECTION TORQUE RECOMMENDATIONS			
STUB ACME / ACME THREADS	INTERNAL TAPERED TUBING THREADS		PREMIUM THREADS
	UP TO 2-3/8"	GREATER THAN 2-3/8"	
600 – 800 FT-LBS	600 – 800 FT-LBS	800 – 1,200 FT-LBS	Consult thread manufacturer's recommendations.

Before first use, D&L recommends disassembly and inspection of the tool unless stated otherwise. Ensure parts have not been damaged during shipping. Replace damaged parts with D&L replacement parts. Contact D&L sales for replacement part information.

Re-assemble the tool after inspection. Install parts in the correct order and orientation. Properly tighten connections.

Before re-using the tool, D&L recommends disassembly and inspection of the tool. Clean parts and ensure parts are in good working condition. Replace worn or damaged parts with D&L replacement parts.

When redressing the tool, D&L recommends replacement of all packing elements, o-rings, etc. Contact D&L sales for redress kit and/or other replacement part information.

D & L OIL TOOLS
P.O. BOX 52220 TULSA, OK 74152
PHONE: (800) 441-3504 www.dloiltools.com



GV CUP PACKER

5" X 2-3/8"

Manual No:
DL-439-5000-922

Revision: **A**

Revision Date:
10/09/2015

Authored by: *J.Anderson*

Approved by: *C.Colvin*

D) SETTING PROCEDURES

CAUTION: Do not run the tool without properly tightening connections. Running the tool with loose connections may damage the tool and cause malfunction.

Trip packer to desired depth.

E) RELEASING PROCEDURES

Pull work string to remove packer from well bore.

F) STORAGE PROCEDURES

When preparing the tool for storage, follow the Pre-Installation Inspection Procedures. Re-assemble the tool with connections hand-tight only and in running position if applicable. Packing elements should be in a relaxed state—free from tension, compression, and other stresses that could cause deformation.

Store the tool, if possible, in an enclosed, temperature and humidity controlled environment. Avoid excessively high temperatures over long periods of time. Shield elastomeric parts from ultraviolet light sources. Keep tool dry and protected from condensation. Do not store in contact with or near volatile or corrosive chemicals. Do not store near ozone generating equipment or operations such as welding.

G) ELASTOMER TRIM TEMPERATURE GUIDE

RUBBER TYPE	TEMPERATURE RANGE
NITRILE	70° - 300°F
HSN (HNBR)	70° - 325°F
VITON	100° - 350°F

H) RECOMMENDED HAND TOOLS

- VISE
- GLOVES
- ALLEN WRENCHES
- TAPE MEASURE
- O-RING PICK
- BAR
 - 1/2-INCH
 - 3/4-INCH
- PAINT BRUSH, 2-INCH
- PIPE WRENCH, 3-FT (2 EA)
- "CHEATER" PIPE, 4-FT LONG
- ADJUSTABLE WRENCH, 12-INCH
- CORDLESS DRILL, 18V
- SNAP RING SPREADER PLIERS
- ALIGNING PUNCH
- SCREWDRIVER SET, FLAT-TIPPED
- SOCKET SETS
 - 3/8-INCH DRIVE
 - 1/2-INCH DRIVE
- HAMMERS
 - SLEDGE
 - BALL PEEN
 - DEAD BLOW

I) DISASSEMBLY

I-1) Clamp mandrel (1) in vise.

I-1.1) Unscrew and remove coupling (2) from mandrel (1).

I-1.2) Remove cup retainers (3), cups (5), and cup spacers (4) from mandrel (1).

I-1.2.1) Remove o-rings (6) from cup retainers (3).

I-2) Unclamp mandrel (1) and remove from vise.



GV CUP PACKER

5" X 2-3/8"

Manual No:
DL-439-5000-922

Revision: **A**

Revision Date:
10/09/2015

Authored by: J.Anderson

Approved by: C.Colvin

J) ASSEMBLY

NOTE₁: Clean and inspect all parts. Replace all worn and damaged parts. Install parts in proper order, and orientation and tighten/torque all connections properly.

J-1) Clamp mandrel (1) in vise.

J-1.1) Install o-rings (6) in o-ring grooves in cup retainers (3).

J-1.2) Install cup spacers (4), cups (5), and cup retainers (3) from mandrel (1).

CAUTION₃: Do not rip or tear o-ring during installation.

J-1.3) Screw coupling (2) onto mandrel (1).

J-2) Unclamp mandrel (1) from vise and remove assembled tool.

K) PARTS LIST

ITEM	QTY	DESCRIPTION	MATERIAL	13.0 – 15.0# P/N 43951	18.0# P/N 43950
1	1	MANDREL	1026	43950210	
2	1	COUPLING	-	CP-BAB-BBB-B	CP-BAB-BBB-A
3	2	CUP RETAINER	1026	43951840	43950840
4	2	CUP SPACER	1026	43945821	
5	2	PACKER CUP	80 DURO NITRILE	P-504-1	P-504-2
6	2	229 O-RING	90 DURO NITRILE	90229	

REDRESS KIT (RDK)		43951050	43950050
ASSEMBLED WEIGHT		20 LBS	19 LBS

K-1) ELASTOMER TRIM OPTIONS

NOTE₂: For temperature range, refer to Elastomer Trim Temperature Guide.

K-1.1) HSN

ITEM	QTY	DESCRIPTION	MATERIAL	13.0 – 15.0# P/N 43951H	18.0# P/N 43950H
5	2	PACKER CUP	80 DURO HSN	P-504-1H	P-504-2H
6	2	229 O-RING	90 DURO HSN	90229H	

REDRESS KIT (RDK)		43951050H	43950050H
-------------------	--	-----------	-----------

K-1.2) VITON

ITEM	QTY	DESCRIPTION	MATERIAL	13.0 – 15.0# P/N 43951V	18.0# P/N 43950V
5	2	PACKER CUP	80 DURO VITON	P-504-1V	P-504-2V
6	2	229 O-RING	90 DURO VITON	90229V	

REDRESS KIT (RDK)		43951050V	43950050V
-------------------	--	-----------	-----------



GV CUP PACKER

5" X 2-3/8"

Manual No:
DL-439-5000-922


Revision: **A**

Revision Date:
10/09/2015

Authored by: *J.Anderson*

Approved by: *C.Colvin*

L) TECHNICAL ILLUSTRATION

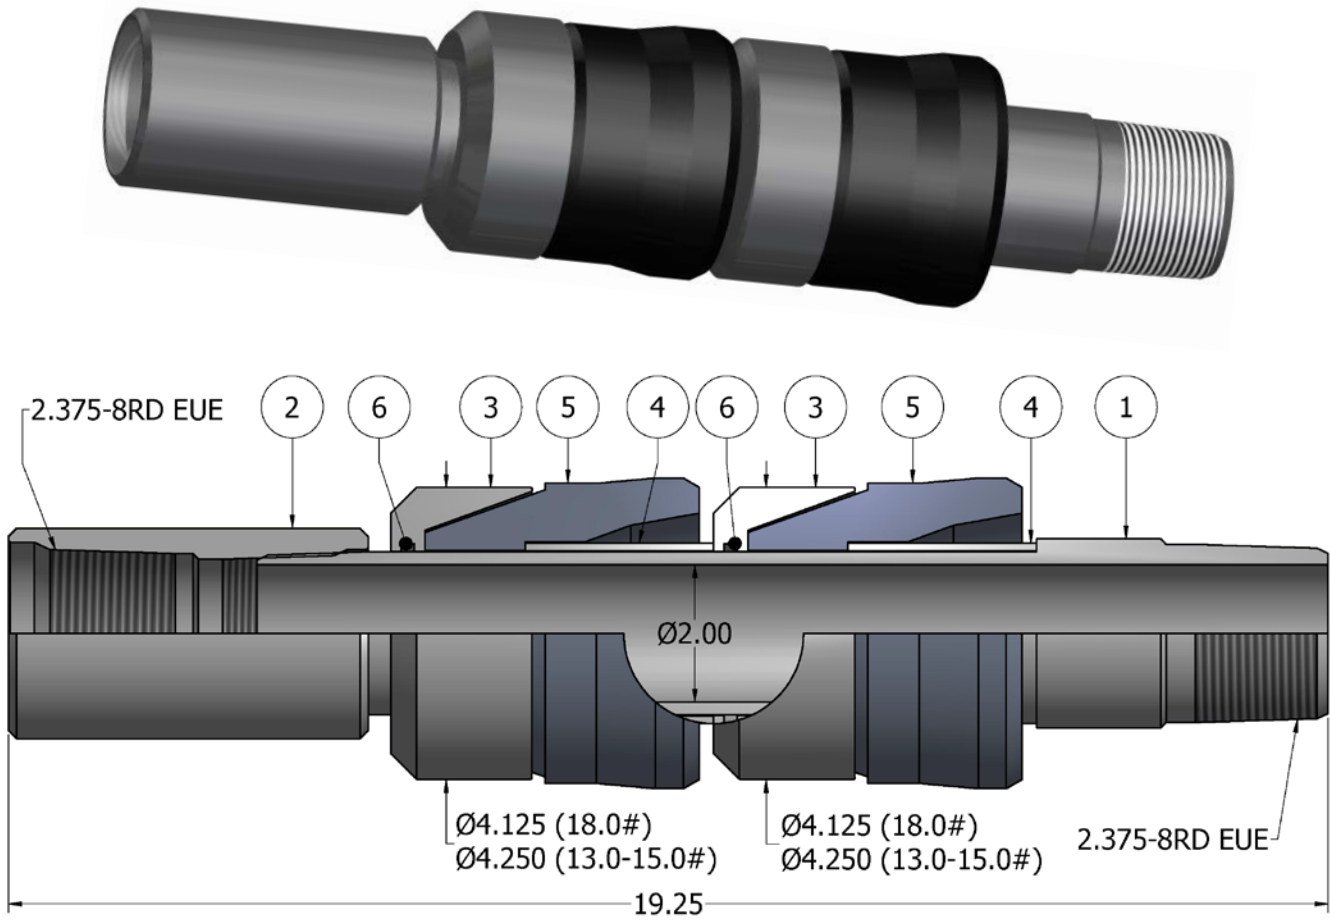

M) REVISION HISTORY

DATE	REVISION	DESCRIPTION OF CHANGES	REVISED BY	APPROVED BY
10/09/2015	A	Created new manual	-	-