



HD ABANDONMENT PACKER

RIGHT-HAND AUTO

7" X 3-1/2" IF TOOL JOINT

Manual No:
DL-615-7000-393

Revision: **H**

Revision Date:
07/22/2019

Authored by: B.Mathis

Approved by: D.Hushbeck

A) DESCRIPTION

The HD Abandonment Packer is a heavy duty service packer ideally suited for all types of squeeze cementing, formation fracturing, high pressure acidizing, etc. This packer is a large opening compression set packer with hydraulic button-type hold down. This packer withstands high pressure from above or below and uses a 3-element packing system, J-slot, and a drag block mechanism for easy setting. This packer has a built-in unloader which circulates across the hold down buttons to improve retrievability and run in performance.

B) SPECIFICATION GUIDE

CASING			TOOL		THREAD CONNECTIONS BOX UP / PIN DOWN	PART NUMBER
SIZE (INCHES)	WEIGHT (LBS/FT)	RECOMMENDED HOLE SIZE (INCHES)	GAGE OD (INCHES)	NOMINAL ID (INCHES)		
7	17.0 - 26.0	6.276 - 6.538	6.000	2.50	3-1/2 IF TOOL JOINT	61572-XBEC 61572H-XBEC ¹ 61572V-XBEC ²
	26.0 - 32.0	6.094 - 6.276	5.875	2.50	3-1/2 IF TOOL JOINT	61570-XBEC 61570H-XBEC ¹ 61570V-XBEC ²

Elastomer Trim Options: ¹HSN, ²Viton

NOTE1: Tools listed are right-hand set / straight pick-up.

DIFFERENTIAL PRESSURE (MAX)	HANGING WEIGHT ON SET PACKER (MAX)	TENSILE LOAD THRU UNSET PACKER (MAX)	TORQUE THRU TOOL (MAX)
10,000 PSI	150,000 LBS*	150,000 LBS	2,000 FT-LBS

*Casing must be cemented for this load rating.

CAUTION1: Before running the tool, check the pressure affected areas chart and consider other effects to be certain that the unloader will remain closed during operation.

CAUTION2: If the HD Abandonment Packer is run with a Retrievable Bridge Plug, make sure the Retrievable Bridge Plug J-slot is compatible with the J-slot on the HD Abandonment Packer. Whichever direction you set the plug, the packer should set in the opposite direction.

D & L OIL TOOLS
P.O. BOX 52220 TULSA, OK 74152
PHONE: (800) 441-3504 www.dloiltools.com

This document is uncontrolled when printed. For the current revision, refer to the electronic copy in the Vault database.



HD ABANDONMENT PACKER

RIGHT-HAND AUTO

7" X 3-1/2" IF TOOL JOINT

Manual No:
DL-615-7000-393

Revision: **H**

Revision Date:
07/22/2019

Authored by: B.Mathis

Approved by: D.Hushbeck

C) PRE-INSTALLATION INSPECTION PROCEDURES

CAUTION3: D&L ships tool connections made-up **HAND TIGHT**—labeled with hand-tight tape on the tool (Fig. 1)—unless stated otherwise. Tighten/torque all connections properly before operating tool.



Fig. 1

GENERAL THREAD CONNECTION TORQUE RECOMMENDATIONS			
STUB ACME / ACME THREADS	INTERNAL TAPERED TUBING THREADS		PREMIUM THREADS
	UP TO 2-3/8"	GREATER THAN 2-3/8"	
1,000 – 1,500 FT-LBS	600 – 800 FT-LBS	800 – 1,200 FT-LBS	Consult thread manufacturer's recommendations.

GENERAL SCREW TORQUE RECOMMENDATIONS									
SCREW SIZE (INCHES)	#6	#8	#10	1/4	5/16	3/8	7/16	1/2	5/8 and larger
TORQUE RANGE (INCH-POUNDS)	5 – 8	10 – 15	18 – 25	25 – 40	50 – 80	90 – 135	160 – 210	250 – 330	450 - 650

Before first use, D&L recommends disassembly and inspection of the tool unless stated otherwise. Ensure parts have not been damaged during shipping. Replace damaged parts with D&L replacement parts. Contact D&L sales for replacement part information.

Re-assemble the tool after inspection. Install parts in the correct order and orientation. Properly tighten connections (Fig. 1).

Before re-using the tool, D&L recommends disassembly and inspection of the tool. Clean parts and ensure parts are in good working condition. Replace worn or damaged parts with D&L replacement parts.

When redressing the tool, D&L recommends replacement of all seals, elements, o-rings, shear screws, etc. Contact D&L sales for redress kit and/or other replacement part information.

D) SETTING PROCEDURES

CAUTION4: Do not run the tool without properly tightening connections. Running the tool with loose connections may damage the tool and cause malfunction.

Run to setting depth. The unloader remains open while running in. Pick up the work string and rotate 1/4 turn at the packer. Slack off weight and set down on the packer to set the slips, close the unloader and compress the packing elements. A minimum weight of 25,000 lbs at the packer is required to pack off the elements.

CAUTION5: Run the tool slowly, as with any hold down type packer, to help prevent dulling of the hydraulic buttons.

E) RELEASING PROCEDURES

Pick up on the work string to open the unloader, allowing time for the tubing and casing pressure to equalize. Continued upward movement of the tubing unsets the slips, relaxes the packing elements and re-jays the packer. The tool may now be moved and reset or pulled from the well.

F) STORAGE RECOMMENDATIONS

When preparing the tool for storage, follow the Pre-Installation Inspection Procedures. Re-assemble the tool with connections hand-tight only and in running position if applicable. Elements should be in a relaxed state—free from tension, compression, and other stresses that could cause deformation.

Store the tool, if possible, in an enclosed, temperature and humidity controlled environment. Avoid excessively high temperatures over long periods of time. Shield elastomeric parts from ultraviolet light sources. Keep tool dry and protected from condensation. Do not store in contact with or near volatile or corrosive chemicals. Do not store near ozone generating equipment or operations such as welding.



HD ABANDONMENT PACKER

RIGHT-HAND AUTO

7" X 3-1/2" IF TOOL JOINT

Manual No:
DL-615-7000-393

Revision: **H**

Revision Date:
07/22/2019

Authored by: B.Mathis

Approved by: D.Hushbeck

G) PRESSURE AFFECTED AREAS GUIDE

When set downhole, the packer mandrel is subjected to a force created by differential pressure above or below the packer that acts on the pressure affected area (i.e., the piston effect). Depending on the drill pipe size and weight and the seal area of the packer the force created by differential pressure acts upwards or downwards on the packer mandrel. An upward force, designated as a negative (-) value, acts to push the packer mandrel up hole and must be accounted for to ensure that the packer remains set. A downward force, designated as a positive value, acts to push the packer mandrel down hole and must be accounted for when releasing the packer. Other factors (e.g., tubing movement due to temperature change) must be considered separately to determine all the forces acting on the packer.

PACKER SIZE (IN)	DRILL PIPE TO PACKER			PRESSURE AFFECTED AREA (IN ²)	
	SIZE (IN)	WEIGHT (LB/FT)	ID (IN)	ABOVE	BELOW
7	2.375	4.85	1.995	2.764 (DOWN)	3.774 (DOWN)
		6.65	1.815	2.764 (DOWN)	3.235 (DOWN)
	2.875	6.85	2.441	0.702 (DOWN)	5.328 (DOWN)
		10.40	2.151	0.702 (DOWN)	4.282 (DOWN)
	3.500	8.50	3.063	-2.427 (UP)	8.017 (DOWN)
		13.30	2.764	-2.427 (UP)	6.648 (DOWN)
		15.50	2.602	-2.427 (UP)	5.965 (DOWN)
	4.000	11.85	3.476	-5.373 (UP)	10.138 (DOWN)
		14.00	3.340	-5.373 (UP)	9.410 (DOWN)
		15.70	3.240	-5.373 (UP)	8.893 (DOWN)
	ABANDONED	N/A	PLUGGED	7.194 (DOWN)	0.648 (DOWN)

Example: Consider a 7" X 3-1/2" HD Abandonment Packer set on 3.500", 13.30 lbs/ft drill pipe with a differential pressure of 3,000 PSI in the annulus around the drill pipe above the packer. What is the force acting on the seal area of the mandrel?

To calculate the force (lbs) acting on the seal area of the mandrel, refer to the Pressure Affected Area Guide for a 7" X 3-1/2" HD Abandonment Packer run on 3.500", 13.30 lbs/ft drill pipe. In this example, the differential pressure from above the packer acts on the seal area of the packer mandrel across a pressure affected area of -2.427 in². Multiplying the differential pressure (3,000 PSI) by the pressure affected area (-2.427 in²) results in a force of -7,281 lbs. The piston effect on the packer mandrel is an upward force of 7,281 lbs.

H) ELASTOMER TRIM TEMPERATURE GUIDE

NITRILE (STD)			
TEMPERATURE RANGE (F°)	DUROMETER		
	END	MIDDLE	END
40° - 125°	80	70	80
125° - 250°	90	70	90
150° - 250°	90	80	90
250° +	Contact D&L Sales		

RUBBER TYPE	TEMPERATURE RANGE
NITRILE	40° - 250°F
HSN (HNBR)	70° - 300°F
VITON	100° - 350°F



HD ABANDONMENT PACKER

RIGHT-HAND AUTO

7" X 3-1/2" IF TOOL JOINT

Manual No:
DL-615-7000-393

Revision: **H**

Revision Date:
07/22/2019

Authored by: B.Mathis

Approved by: D.Hushbeck

I) RECOMMENDED TOOLS

I-1) HAND TOOLS

- VISE
- GLOVES
- ALLEN WRENCHES
- TAPE MEASURE
- O-RING PICK
- BAR
 - 1/2-INCH
 - 3/4-INCH
- PAINT BRUSH, 2-INCH
- PIPE WRENCH, 3-FT (2 EA)
- "CHEATER" PIPE, 4-FT LONG
- ADJUSTABLE WRENCH, 12-INCH
- CORDLESS DRILL, 18V
- SNAP RING SPREADER PLIERS
- ALIGNING PUNCH
- SCREWDRIVER SET, FLAT-TIPPED
- SOCKET SETS
 - 3/8-INCH DRIVE
 - 1/2-INCH DRIVE
- HAMMERS
 - SLEDGE
 - BALL PEEN
 - DEAD BLOW

I-2) OPTIONAL SPECIAL TOOLS

ITEM	QTY	DESCRIPTION	PART NUMBER
T1	1	DRAG BLOCK ASSEMBLY TOOL	AT070110
T2	1	BUTTON REMOVAL TOOL	AT-BRT000
T3	1 GAL	KOPR-KOTE® ANTI-SEIZE LUBRICANT	DL-KOPR-KOTE-1G

J) DISASSEMBLY

J-1) Clamp top sub (1) in vise.

J-1.1) Unscrew and remove set screws (35) from bottom sub (28).

J-1.2) Unscrew and remove bottom sub (28) from J-pin bottom sub (23).

J-1.2.1) Remove o-ring (45) from bottom sub (28).

J-1.3) Unscrew and remove set screws (39) from J-pin bottom sub (23). Slide J-body (20) and drag block body assembly as needed to access screws.

J-1.4) Unscrew and remove J-pin bottom sub (23) from inner mandrel (2).

NOTE₂: Drag block body assembly must be free to rotate.

J-1.4.1) Remove o-ring (41) from J-pin bottom sub (23).

J-1.5) Compress drag blocks (22) with drag block assembly tool (T1).

J-1.6) Unscrew and remove set screws (37) from drag block body (18). Rotate drag block retainer (21) as needed to access screws.

J-1.7) Unscrew J-body (20) from drag block body (18) (**NOTE₃:** Left-hand threads).

J-1.7.1) Remove retaining ring (31) from J-body (20).

J-1.8) Remove drag block retainer (21) from drag block body (18).

J-1.9) Release drag blocks (22). Remove drag blocks (22) and drag block springs (3) from drag block body (18).

J-1.10) Unscrew and separate lower cone (16) from rubber retainer (15) to allow access to rubber mandrel (11).

J-1.11) Unscrew rubber mandrel (11) from valve body (32). Remove rubber mandrel assembly and disassemble:

J-1.11.1) Remove elements (13, 14), rubber spacers (12), and rubber retainer (15) from rubber mandrel (11).

J-1.11.1.1) Unscrew and remove lower gage ring (29) from rubber retainer (15).

J-1.11.2) Unscrew and remove rubber mandrel cap (19) from rubber mandrel (11). Move drag block body (18) upwards as necessary to access rubber mandrel cap (19).

J-1.11.3) Wedge lower slips (17) outward (if needed). Remove drag block body assembly and disassemble:

J-1.11.3.1) Remove wedges (if needed). Remove lower slips (17) and lower slip springs (25) from drag block body (18).



HD ABANDONMENT PACKER

RIGHT-HAND AUTO

7" X 3-1/2" IF TOOL JOINT

Manual No:
DL-615-7000-393

Revision: **H**

Revision Date:
07/22/2019

Authored by: B.Mathis

Approved by: D.Hushbeck

J) DISASSEMBLY (cont'd)

- J-1.11.4) Remove lower cone (16) from rubber mandrel (11).
- J-1.12) Unscrew and remove upper gage ring (29) from valve body (32).
- J-1.13) Unscrew and remove valve body (32) from central body (10).
 - J-1.13.1) Remove o-ring (43) from valve body (32).
- J-1.14) Unscrew and remove central body (10) from hold down body (6).
- J-1.15) Unscrew and remove seal retainer (27) from seal receptacle (5).
- J-1.16) Unscrew and remove seal receptacle (5) from compensating mandrel (8).
 - J-1.16.1) Remove o-rings (43, 44) and seal (24) from seal receptacle (5).
- J-2) Unclamp and remove top sub (1) from vise. Clamp lower end of inner mandrel (2) in vise.
 - CAUTION₆:** Do **NOT** wrench or clamp on seal surface.
 - J-2.1) Unscrew and remove set screws (38) from top sub (1).
 - J-2.2) Unscrew and remove top sub (1) from inner mandrel (2).
 - J-2.2.1) Remove o-ring (42) from top sub (1).
 - J-2.3) Unscrew and remove hold down cap (7) from hold down body (6).
 - J-2.4) Slide strap retainer (33) down and out-of-the-way temporarily.
 - J-2.5) Unscrew and remove flat head cap screws (34) from hold down body (6).
 - J-2.6) Remove hold down straps (36) from hold down body (6).
 - J-2.7) Remove hold down button springs (26) from hold down body (6).
 - J-2.8) Remove hold down buttons (30) from hold down body (6) with button removal tool (T2).
 - J-2.8.1) Remove o-rings (40) from hold down buttons (30).
 - J-2.9) Unscrew and remove hold down extension (4) from hold down body (6).
 - J-2.9.1) Remove o-rings (45) from hold down extension (4).
 - J-2.10) Remove hold down body (6) from inner mandrel (2).
 - J-2.10.1) Remove o-rings (43, 47) from hold down body (6).
 - J-2.11) Remove strap retainer (33) from inner mandrel (2).
 - J-2.12) Remove compensating mandrel (8) from inner mandrel (2).
 - J-2.12.1) Remove compensating piston (9) from compensating mandrel (8).
 - J-2.12.2) Remove o-rings (46, 47) from compensating piston (9).
- J-3) Unclamp and remove inner mandrel (2) from vise.

K) ASSEMBLY

NOTE₄: Clean and inspect all parts. Replace all worn and damaged parts. Install parts in proper order, and orientation and tighten/torque all connections properly.

CAUTION₇: To ensure tool operates properly, install o-rings in o-ring grooves **NOT** thread reliefs (Fig. 2).

NOTE₈: Apply anti-seize lubricant (T3) on STUB ACME and drill pipe connections when making up connections.

- K-1) Clamp inner mandrel (2) in vise.

CAUTION₆: Do **NOT** wrench or clamp on seal surface.

- K-1.1) Install o-rings (46, 47) in o-ring grooves in compensating piston (9).




Fig. 2



HD ABANDONMENT PACKER

RIGHT-HAND AUTO

7" X 3-1/2" IF TOOL JOINT

Manual No:
DL-615-7000-393

Revision: **H**

Revision Date:
07/22/2019

Authored by: B.Mathis

Approved by: D.Hushbeck

K) ASSEMBLY (cont'd)

K-1.2) Install compensating piston (9) onto compensating mandrel (8).

NOTE₇: Compensating piston **MUST** be installed in correct direction.

CAUTION₈: Do not rip or tear o-ring during installation.

K-1.3) Install compensating mandrel (8) on to inner mandrel (2).

K-1.4) Install strap retainer (33) onto inner mandrel (2).

K-1.5) Install o-rings (43, 47) in o-ring grooves in hold down body (6).

K-1.6) Install hold down body (6) onto inner mandrel (2).

K-1.7) Install o-rings (45) in o-ring grooves in upper hold down extension (4).

K-1.8) Screw hold down extension (4) into hold down body (6).

CAUTION₈: Do not rip or tear o-ring during installation.

K-1.9) Install o-rings (40) in o-ring grooves in hold down buttons (30).

K-1.10) Install hold down buttons (30) (Fig. 3) and hold down button springs (26) into hold down body (6).

NOTE₅: Install three (3 ea) springs per button (Fig. 4).

K-1.11) Align slot in hold down buttons (30) with slot in hold down body (6). Set hold down straps (36) in slots in hold down buttons (30) and hold down body (6) (Fig. 4).

K-1.12) Screw flat head cap screws (34) into hold down body (6) (Fig. 4).

K-1.13) Install strap retainer (33) onto hold down body (6) to capture lower ends of hold down straps (36).

K-1.14) Screw hold down cap (7) onto hold down body (6) to capture upper ends of hold down straps (36).

K-1.15) Install o-ring (42) in o-ring groove in top sub (1).

K-1.16) Screw top sub (1) onto inner mandrel (2).

CAUTION₈: Do not rip or tear o-ring during installation.

K-1.17) Screw set screws (38) into top sub (1).

K-2) Unclamp and remove inner mandrel (2) from vise and clamp top sub (1) in vise.

K-2.1) Install o-rings (43, 44) and seal (24) in o-ring grooves in seal receptacle (5).

K-2.2) Screw seal receptacle (5) onto compensating mandrel (30).

CAUTION₈: Do not rip or tear o-ring during installation.

K-2.3) Screw seal retainer (27) onto seal receptacle (5).

CAUTION₈: Do not rip or tear o-ring or seal during installation.

K-2.4) Screw central body (10) onto hold down body (6).

CAUTION₈: Do not rip or tear o-ring during installation.

K-2.5) Install o-ring (43) in o-ring groove in valve body (32).

K-2.6) Screw valve body (32) into central body (10).

K-2.7) Screw upper gage ring (29) onto valve body (32).

K-2.8) Assemble rubber mandrel assembly and install:

K-2.8.1) Install lower cone (16) onto rubber mandrel (11).

K-2.8.2) Assemble drag block body assembly and install:

K-2.8.2.1) Install lower slips (17) and lower slip springs (25) into drag block body (18). Wedge slips outwards.

NOTE₆: Install two (2ea) springs per slip (Fig. 5).

K-2.8.2.2) Install drag block body assembly onto rubber mandrel (11). Remove wedges.



Fig. 3




Fig. 4




Fig. 5



HD ABANDONMENT PACKER

RIGHT-HAND AUTO

7" X 3-1/2" IF TOOL JOINT

Manual No:
DL-615-7000-393

Revision: **H**

Revision Date:
07/22/2019

Authored by: B.Mathis

Approved by: D.Hushbeck

K) ASSEMBLY (cont'd)

K-2.8.3) Screw rubber mandrel cap (19) onto rubber mandrel (11). Move drag block body (18) upwards on rubber mandrel (11) as necessary to access threads on rubber mandrel (11).

K-2.8.4) Screw gage ring (29) onto rubber retainer (15).

K-2.8.5) Install rubber retainer (15), elements (13, 14), and rubber spacers (12) onto rubber mandrel (11).

K-2.8.6) Install rubber mandrel assembly onto inner mandrel (2). Screw rubber mandrel (11) into valve body (32).

CAUTION₈: Do not rip or tear o-ring during installation.

K-2.9) Screw lower cone (16) into rubber retainer (15).

K-2.10) Install drag blocks (22) and drag block springs (3) into drag block body (18). Compress drag blocks (22) with drag block assembly tool (T1).

NOTE₁₀: Install six (6ea) springs per drag block (Fig. 6).

K-2.11) Install drag block retainer (21) onto drag block body (18) to capture ends of drag blocks (22).

K-2.12) Install retaining ring (31) onto J-body (20).

K-2.13) Screw J-body (20) into drag block body (18) (**NOTE₃**: Left-hand threads).

NOTE₂: Drag block body assembly must be free to rotate.

K-2.14) Screw set screws (37) into drag block body (18). Move drag block retainer (21) as necessary to access threaded holes in drag block body (18). Release drag blocks (22).

K-2.15) Install o-ring (41) in o-ring groove in J-pin bottom sub (23).

K-2.16) Screw J-pin bottom sub (23) onto inner mandrel (2).

CAUTION₈: Do not rip or tear o-ring during installation.

K-2.17) Screw set screws (39) into J-pin bottom sub (23). Slide J-body (20) and drag block body assembly as needed to access threaded holes in J-pin bottom sub (23).

K-2.18) Install o-ring (45) in o-ring groove in bottom sub (28).

K-2.19) Screw bottom sub (28) into J-pin bottom sub (23).

CAUTION₈: Do not rip or tear o-ring during installation.

K-2.20) Screw set screws (35) into bottom sub (28).

K-3) Unclamp top sub (1) from vise and remove assembled tool.




Fig. 6



HD ABANDONMENT PACKER

RIGHT-HAND AUTO

7" X 3-1/2" IF TOOL JOINT

Manual No:
DL-615-7000-393

Revision: **H**

Revision Date:
07/22/2019

Authored by: *B.Mathis*

Approved by: *D.Hushbeck*

L) PARTS LIST

ITEM	QTY	DESCRIPTION	MATERIAL	26.0 – 32.0# P/N 61570-XBEC	17.0 - 26.0# P/N 61572-XBEC
1	1	TOP SUB	DLMS110	61370615-XBEC	
2	1	INNER MANDREL	DLMS125	61370215-T	
3	36	DRAG BLOCK SPRING	INCONEL	9101900	
4	1	HOLD DOWN EXTENSION	DLMS110	61370310	
5	1	SEAL RECEPTACLE	DLMS110	61370730	
6	1	HOLD DOWN BODY	DLMS110	61370320	
7	1	HOLD DOWN CAP	DLMS110	61370370	61372370
8	1	COMPENSATING MANDREL	DLMS110	61370240	
9	1	COMPENSATING PISTON	DLMS110	61370715	
10	1	CENTRAL BODY	DLMS110	61370385	
11	1	RUBBER MANDREL	DLMS110	61370220	
12	2	RUBBER SPACER	DLMS60	60270840	61172840
13	1	ELEMENT	80 DURO NITRILE	60270512	60272512
14	2	ELEMENT	90 DURO NITRILE	60270513	60272513
15	1	RUBBER RETAINER	DLMS110	61170850HT	
16	1	LOWER CONE	DLMS110	60070420HT	
17	4	LOWER SLIP W/CARBIDE	DLMS60	60070135C	
18	1	DRAG BLOCK BODY	DLMS110 / DLMS60	61370335	
19	1	RUBBER MANDREL CAP	DLMS60	60070230	
20	1	J-BODY	DLMS110	61370340	
21	1	DRAG BLOCK RETAINER	DLMS60	60070910	
22	6	DRAG BLOCK W/CARBIDE	DLMSDB4	9070900C	9080900C
23	1	J-PIN BOTTOM SUB	DLMS110	61370630-XAB	
24	1	SEAL	90 DURO NITRILE	61370520	
25	8	LOWER SLIP SPRING	ELGILOY	7170901	
26	18	HOLD DOWN BUTTON SPRING	ELGILOY	61370975	
27	1	SEAL RETAINER	DLMS110	61370530	
28	1	BOTTOM SUB	DLMS110	61370635-XBEC	



HD ABANDONMENT PACKER

RIGHT-HAND AUTO

7" X 3-1/2" IF TOOL JOINT

Manual No:
DL-615-7000-393

Revision: **H**

Revision Date:
07/22/2019

Authored by: B.Mathis

Approved by: D.Hushbeck

L) PARTS LIST (cont'd)

ITEM	QTY	DESCRIPTION	MATERIAL	26.0 – 32.0# P/N 61570-XBEC	17.0 - 26.0# P/N 61572-XBEC
29	2	GAGE RING	DLMS60	61170830	61172830
30	6	HOLD DOWN BUTTON W/CARBIDE	DLMS60	61370140C	61372140C
31	1	RETAINING RING	DLMS60	60070911	
32	1	VALVE BODY	DLMS110	61370350	
33	1	STRAP RETAINER	DLMS110	61370650	61372650
34	3	FLAT HEAD CAP SCREW 5/16-18 UNC X 1/2	STEEL	FHSC031C050	
35	4	SET SCREW 1/4-20 UNC X 1/2	STEEL	SSS025C050	
36	3	HOLD DOWN STRAP	DLMS110	61370360	
37	3	SET SCREW 5/16-18 UNC X 1/2	STEEL	SSS031C050	
38	3	SET SCREW 3/8-16 UNC X 3/8	STEEL	SSS037C037	
39	2	SET SCREW 3/8-16 UNC X 1/2	STEEL	SSS037C050	
40	6	230 O-RING	90 DURO NITRILE	90230	
41	1	233 O-RING	90 DURO NITRILE	90233	
42	1	235 O-RING	90 DURO NITRILE	90235	
43	3	241 O-RING	90 DURO NITRILE	90241	
44	1	243 O-RING	90 DURO NITRILE	90243	
45	3	339 O-RING	90 DURO NITRILE	90339	
46	1	344 O-RING	90 DURO NITRILE	90344	
47	2	350 O-RING	90 DURO NITRILE	90350	

REDRESS KIT (RDK)		61570050	61572050
REDRESS KIT (RDK) W/SCREWS		61570050-1	61572050-1
ASSEMBLED WEIGHT		385 LBS	388 LBS



HD ABANDONMENT PACKER

RIGHT-HAND AUTO

7" X 3-1/2" IF TOOL JOINT

Manual No:
DL-615-7000-393

Revision: **H**

Revision Date:
07/22/2019

Authored by: B.Mathis

Approved by: D.Hushbeck

L) PARTS LIST (cont'd)

L-1) ELASTOMER TRIM OPTIONS

NOTE: For temperature range, refer to Elastomer Trim Temperature Guide.

L-1.1) HSN

ITEM	QTY	DESCRIPTION	MATERIAL	26.0 – 32.0# P/N 61570H-XBEC	17.0 - 26.0# P/N 61572H-XBEC
13	1	ELEMENT	80 DURO HSN	60270512H	60272512H
14	2	ELEMENT	90 DURO HSN	60270513H	60272513H
24	1	SEAL	90 DURO HSN	61370520H	
40	6	230 O-RING	90 DURO HSN	90230H	
41	1	233 O-RING	90 DURO HSN	90233H	
42	1	235 O-RING	90 DURO HSN	90235H	
43	3	241 O-RING	90 DURO HSN	90241H	
44	1	243 O-RING	90 DURO HSN	90243H	
45	3	339 O-RING	90 DURO HSN	90339H	
46	1	344 O-RING	90 DURO HSN	90344H	
47	2	350 O-RING	90 DURO HSN	90350H	

REDRESS KIT (RDK)		61570050H	61572050H
REDRESS KIT (RDK) W/SCREWS		61570050H-1	61572050H-1

L-1.2) VITON

ITEM	QTY	DESCRIPTION	MATERIAL	26.0 – 32.0# P/N 61570V-XBEC	17.0 - 26.0# P/N 61572V-XBEC
13	1	ELEMENT	80 DURO VITON	60270512V	60272512V
14	2	ELEMENT	90 DURO VITON	60270513V	60272513V
24	1	SEAL	90 DURO VITON	61370520V	
40	6	230 O-RING	90 DURO VITON	90230V	
41	1	233 O-RING	90 DURO VITON	90233V	
42	1	235 O-RING	90 DURO VITON	90235V	
43	3	241 O-RING	90 DURO VITON	90241V	
44	1	243 O-RING	90 DURO VITON	90243V	
45	3	339 O-RING	90 DURO VITON	90339V	
46	1	344 O-RING	90 DURO VITON	90344V	
47	2	350 O-RING	90 DURO VITON	90350V	

REDRESS KIT (RDK)		61570050V	61572050V
REDRESS KIT (RDK) W/SCREWS		61570050V-1	61572050V-1



HD ABANDONMENT PACKER

RIGHT-HAND AUTO

7" X 3-1/2" IF TOOL JOINT

Manual No:
DL-615-7000-393


Revision: **H**


Revision Date:
07/22/2019

Authored by: *B.Mathis*

Approved by: *D.Hushbeck*

M) TECHNICAL ILLUSTRATION

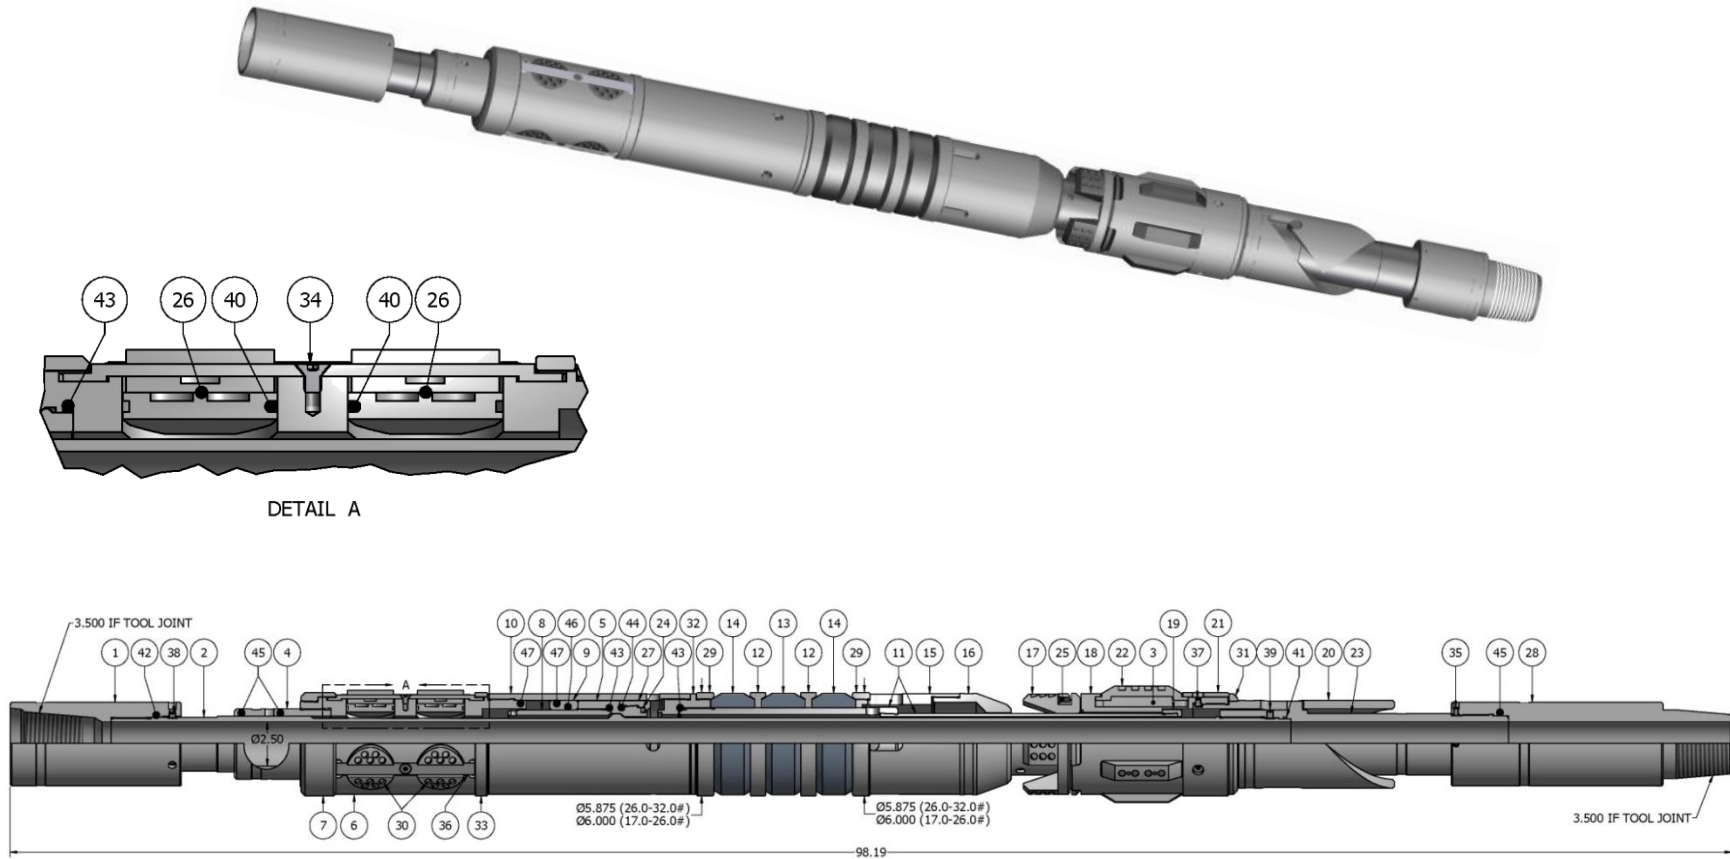

	HD ABANDONMENT PACKER RIGHT-HAND AUTO 7” X 3-1/2” IF TOOL JOINT	Manual No: DL-615-7000-393
		Revision: H
		Revision Date: 07/22/2019
<i>Authored by: B.Mathis</i>		<i>Approved by: D.Hushbeck</i>

N) REVISION HISTORY

DATE	REVISION	DESCRIPTION OF CHANGES	REVISED BY	APPROVED BY
07/22/2019	H	Revised max. differential pressure 10,000 psi was 8,000 psi, nitrile temp range; Added RDK with set screws	J.Anderson	Z.Speer
07/06/2016	G	Added General Screw Torque Recommendations; Revised P/N 61370975 qty 18 was 12, setting weight at packer 25,000 lbs was 14,000 lbs, steps for disassembling and assembling rubber mandrel assembly	J.Anderson	C.Colvin
12/14/2015	F	Revised: Elastomer Durometer Temperatures – Nitrile (90/80/90 Duro) was 250° - 300°F, Nitrile (Contact D&L Sales) was 300°F +, Rubber Type Temperature Ranges – Nitrile was 70° - 300°F, HSN was 70° - 325°F;	B.Mathis	B.Oligschlaeger
11/12/2015	E	Added: HSN and Viton options, max. torque thru tool; Removed: tool drift ID	J.Anderson	K.Riggs
12/09/14	D	Revised: pressure affected area guide, P/N 61570-XBEC assembled weight 385 lbs was 355 lbs, P/N 61572-XBEC assembled weight 388 lbs was 357 lbs; Added: tool drift ID, pre-installation inspection and storage procedures, recommended hand tools, RDK P/N 61572050, KOPR-KOTE (T3)	J.Anderson	J.McArthur