



# DL SHEAR TENSION PACKER, NON-WELDED 7" X 2-7/8"

Manual No:  
**DL-412-7000-1582**

Revision: **A**

Revision Date:  
**08/01/2022**

Authored by: *J.Anderson*

Approved by: *J.Johnson*

## A) DESCRIPTION

The DL Tension Packer and DL Shear Tension Packer are economical, compact tools for injection, pumping, medium range treating and production applications. These packers are set by 1/4 right-hand rotation of the tubing and then pull tension. To release these packers, slack off the tubing and the packer will automatically re-jay into the release position. These packers have a right-hand rotation release allowing retrieval of the tubing string.

The DL Tension Packer can be run in tension or compression. When the DL Tension Packer is run in compression, the right-hand release option cannot be utilized.

The DL Shear Tension Packer features an adjustable straight pull safety shear release. This packer is not designed to be run in compression.

## B) SPECIFICATION GUIDE

CASING			TOOL OD (INCHES)	TOOL ID (INCHES)	THREAD CONNECTION BOX UP / PIN DOWN	PART NUMBER
SIZE (INCHES)	WEIGHT (LBS/FT)	RECOMMENDED HOLE SIZE				
7	17.0 – 29.0	6.184 – 6.538	6.000	2.44	2-7/8 EUE	41270-3 41270H-3 <sup>1</sup> 41270V-3 <sup>2</sup> 41270C-3 41270HC-3 <sup>1</sup> 41270VC-3 <sup>2</sup>

Tool Options: <sup>1</sup>HSN, <sup>2</sup>Viton, <sup>3</sup>Nitrile, Carbide, <sup>4</sup>HSN, Carbide, <sup>5</sup>Viton, Carbide

DIFFERENTIAL PRESSURE (MAX)	TENSILE LOAD THRU TOOL (MAX)
4,000 PSI	40,000 LBS

## C) PRE-INSTALLATION INSPECTION PROCEDURES

**CAUTION:** D&L ships tool connections made-up **HAND TIGHT**—labeled with hand-tight tape on the tool (Fig. 1)—unless stated otherwise. Tighten/torque all connections properly before operating tool.



Fig. 1

GENERAL THREAD CONNECTION TORQUE RECOMMENDATIONS			
STUB ACME / ACME THREADS	INTERNAL TAPERED TUBING THREADS		PREMIUM THREADS
	UP TO 2-3/8"	GREATER THAN 2-3/8"	
600 – 800 FT-LBS	600 – 800 FT-LBS	800 – 1,200 FT-LBS	Consult thread manufacturer's recommendations.

D & L OIL TOOLS  
P.O. BOX 52220 TULSA, OK 74152  
PHONE: (800) 441-3504 [www.dloiltools.com](http://www.dloiltools.com)



# DL SHEAR TENSION PACKER, NON-WELDED 7" X 2-7/8"

Manual No:  
**DL-412-7000-1582**

Revision: **A**

Revision Date:  
**08/01/2022**

Authored by: J.Anderson

Approved by: J.Johnson

## C) PRE-INSTALLATION INSPECTION PROCEDURES (cont'd)

GENERAL SCREW TORQUE RECOMMENDATIONS									
SCREW SIZE (INCHES)	#6	#8	#10	1/4	5/16	3/8	7/16	1/2	5/8 and larger
TORQUE RANGE (INCH-POUNDS)	5 – 8	10 – 15	18 – 25	25 – 40	50 – 80	90 – 135	160 – 210	250 – 330	450 - 650

Before first use, D&L recommends disassembly and inspection of the tool unless stated otherwise. Ensure parts have not been damaged during shipping. Replace damaged parts with D&L replacement parts. Contact D&L sales for replacement part information.

Re-assemble the tool after inspection. Install parts in the correct order and orientation. Properly tighten connections.

Before re-using the tool, D&L recommends disassembly and inspection of the tool. Clean parts and ensure parts are in good working condition. Replace worn or damaged parts with D&L replacement parts.

When redressing the tool, D&L recommends replacement of element, o-rings, shear screws, etc. Contact D&L sales for redress kit and/or other replacement part information.

## D) SETTING PROCEDURES

**CAUTION<sub>2</sub>:** Do not run the tool without properly tightening connections. Running the tool with loose connections may damage the tool and cause malfunction.

Before running the packer, check the safety shear release to see that the proper quantities of shear pins are installed.

Run to setting depth. Set down the work string and rotate 1/4 turn to the right at the packer. Pull tension on the packer to set the slips and compress the packing elements. A minimum pull of 14,000 lbs. at the packer is required to pack off the elements.

**NOTE<sub>1</sub>:** Take care not to pull more than two-thirds (2/3) of the safety shear setting.

## E) RELEASING PROCEDURES

Set down the work string to unset the slips, relax the element and re-jay the packer. The packer may now be moved and reset, or pulled from the well.

### E-1) EMERGENCY RELEASE

In the event the packer will not release in the normal manner, pull to shear the safety shear release. Once it shears, set down one to two feet (1'-2') and pick up to ensure the packer is released. Trip out with the packer. If the safety shear release will not shear, torque the work string to the right until the secondary release threads break loose. Rotate 12-15 additional turns to the right at the tool and trip out.

## F) STORAGE RECOMMENDATIONS

When preparing the tool for storage, follow the Pre-Installation Inspection Procedures. Re-assemble the tool with connections hand-tight only and in running position if applicable. Elements should be in a relaxed state—free from tension, compression, and other stresses that could cause deformation.

Store the tool, if possible, in an enclosed, temperature and humidity controlled environment. Avoid excessively high temperatures over long periods of time. Shield elastomeric parts from ultraviolet light sources. Keep tool dry and protected from condensation. Do not store in contact with or near volatile or corrosive chemicals. Do not store near ozone generating equipment or operations such as welding.



# DL SHEAR TENSION PACKER, NON-WELDED 7" X 2-7/8"

Manual No:  
DL-412-7000-1582

Revision: A

Revision Date:  
08/01/2022

Authored by: J.Anderson

Approved by: J.Johnson

## G) ELASTOMER TRIM TEMPERATURE GUIDE

RUBBER TYPE	TEMPERATURE RANGE
NITRILE	40° - 250°F
HSN (HNBR)	70° - 300°F
VITON	100° - 350°F

## H) RECOMMENDED HAND TOOLS

- VISE
- GLOVES
- ALLEN WRENCHES
- TAPE MEASURE
- O-RING PICK
- BAR
  - 1/2-INCH
  - 3/4-INCH
- PAINT BRUSH, 2-INCH
- PIPE WRENCH, 3-FT (2 EA)
- "CHEATER" PIPE, 4-FT LONG
- ADJUSTABLE WRENCH, 12-INCH
- CORDLESS DRILL, 18V
- SNAP RING SPREADER PLIERS
- ALIGNING PUNCH
- SCREWDRIVER SET, FLAT-TIPPED
- SOCKET SETS
  - 3/8-INCH DRIVE
  - 1/2-INCH DRIVE
- HAMMERS
  - SLEDGE
  - BALL PEEN
  - DEAD BLOW

## I) DISASSEMBLY

I-1) Clamp top coupling (6) in vise.

I-1.1) Unscrew and remove pressure plug (13) from shear sleeve (8).

I-1.2) Remove shear pins (5) from shear sleeve (8). Rotate shear sleeve (8) as needed to access shear pins (5).

I-1.3) Unscrew and remove bottom sub (4) from mandrel (1).

I-1.3.1) Remove o-ring (16) from bottom sub (4).

I-1.4) Unscrew and remove shear sleeve (8) from flange (19).

I-1.5) Remove flange (19) from mandrel (1).

I-1.6) Remove element (3) and cone (2) from mandrel (1).

I-1.7) Wedge slips (12) outward (if needed). Unscrew and remove set screws (22) from upper slip housing (17).

I-1.8) Remove upper slip housing (17) from mandrel (1).

I-1.8.1) Remove wedges (if needed). Remove slips (12) and slip springs (11) from upper slip housing (17).

I-1.9) Unscrew and remove button head screws (14) and star washers (20) from cage ring (9).

I-1.10) Remove drag springs (10) from J-body (7).

I-1.11) Unscrew and remove button head screws (15) from cage ring (9).

I-1.12) Remove J-body (7) from J-pin ring (18) and mandrel (1).

I-1.13) Unscrew and remove mandrel (1) from top coupling (6) (**NOTE**<sub>2</sub>: Left-hand threads).

**CAUTION**<sub>3</sub>: Do NOT wrench or clamp on seal surface.

I-1.13.1) Remove cage ring (9) from mandrel (1).

I-1.13.2) Unscrew and remove set screws (21) from J-pin ring (18).

I-1.13.3) Unscrew and remove J-pin ring (18) from mandrel (1).

I-2) Unclamp and remove top coupling (6) from vise.



# DL SHEAR TENSION PACKER, NON-WELDED 7" X 2-7/8"

Manual No:  
**DL-412-7000-1582**

Revision: **A**

Revision Date:  
**08/01/2022**

Authored by: J.Anderson

Approved by: J.Johnson

## J) ASSEMBLY

**NOTE3:** Clean and inspect all parts. Replace all worn and damaged parts. Install parts in proper order, and orientation and tighten/torque all connections properly.

J-1) Clamp top coupling (6) in vise.

J-1.1) Screw J-pin ring (18) onto mandrel (1).

J-1.2) Screw set screws (21) into J-pin ring (18).

J-1.3) Install cage ring (9) onto mandrel (1).

J-1.4) Screw mandrel (1) into top coupling (6) (**NOTE2:** Left-hand threads).

**CAUTION3:** Do NOT wrench or clamp on seal surfaces.

J-1.5) Install J-body (7) onto mandrel (1) and J-pin ring (18).

J-1.6) Align threaded holes in cage ring (9) with holes in J-body (7). Screw set screws (15) into cage ring (9).

J-1.7) Set drag springs (10) in place on J-body (7).

**NOTE5:** Install drag springs in sets of three (3ea).

J-1.8) Align holes in drag springs (10) with holes in J-body (7) and threaded holes in cage ring (9). Screw button head cap screws (14) with star washers (20) into cage ring (9).

J-1.9) Install slips (12) and slip springs (11) into upper slip housing (17). Wedge slips outward.

**NOTE4:** Install six (6ea) spring per slip (Fig. 2).

J-1.10) Install upper slip housing (17) onto mandrel (1) and screw onto J-body (7). Remove wedges.

J-1.11) Screw set screws (22) into upper slip housing (17).

J-1.12) Install cone (2) and element (3) onto mandrel (1)

J-1.13) Install shear sleeve flange (19) onto mandrel (1).

J-1.14) Install shear sleeve (8) onto mandrel (1) and screw into flange (19).

J-1.15) Install o-ring (16) in o-ring groove in bottom sub (4).

J-1.16) Screw bottom sub (4) onto mandrel (1).

**CAUTION4:** Do not rip or tear o-ring during installation.

J-1.17) One at a time, align plug hole in shear sleeve (8) with counterbore in bottom sub (4) and insert shear pin (5).

J-1.18) After installing desired quantity of shear pins (5), screw pressure plug (13) into shear sleeve (8).

J-2) Unclamp top coupling (6) from vise and remove assembled tool.




Fig. 2

## K) PARTS LIST

ITEM	QTY	DESCRIPTION	MATERIAL	P/N 41270-3
1	1	MANDREL	DLMS60	41270210A-3
2	1	CONE	DLMS35	40070410
3	1	ELEMENT	80 DURO NITRILE	40570512
4	1	BOTTOM SUB	DLMS60	41070615
5	10	SHEAR PIN (4000#)	DLM360BRS	41000990
6	1	TOP COUPLING	DLMS60	40070620
7	1	J-BODY	DLMS60	41070310A-3
8	1	SHEAR SLEEVE	DLMS60	41056850A-3



# DL SHEAR TENSION PACKER, NON-WELDED 7" X 2-7/8"

Manual No:  
**DL-412-7000-1582**

Revision: **A**

Revision Date:  
**08/01/2022**

Authored by: J.Anderson

Approved by: J.Johnson

## K) PARTS LIST (cont'd)

ITEM	QTY	DESCRIPTION	MATERIAL	P/N 41270-3
9	1	CAGE RING	DLMS60	41070325
10	12	DRAG SPRING	DLMSSP301	40070920
11	24	SLIP SPRING	-	7170901
12	4	SLIP	DLMS35	40070110
13	1	1/4 NPT SOCKET PRESSURE PLUG	4140	SPP025
14	8	5/16-18 UNC X 3/4 BUTTON HEAD SOCKET CAP SCREW	STEEL	BHSC031C075
15	6	5/16-18 UNC X 1/2 BUTTON HEAD SOCKET CAP SCREW	STEEL	BHSC031C050
16	1	232 O-RING	90 DURO NITRILE	90232
17	1	UPPER SLIP HOUSING	DLMS80	41070310B-3
18	1	J-PIN RING	DLMS80	41270210B-3
19	1	SHEAR SLEEVE FLANGE	DLMS35	41070850B-3
20	16	5/16 TOOTHED STAR WASHER	STEEL	ELW031
21	3	1/4-20 UNC X 1/4 SOCKET SET SCREW	STEEL	SSS025C025
22	4	1/4-20 UNC X 3/8 SOCKET SET SCREW	STEEL	SSS025C037

REDRESS KIT (RDK)	41270050-3
ASSEMBLED WEIGHT	84 LBS

### K-1) ELASTOMER TRIM OPTIONS

**NOTE:** For temperature range, refer to Elastomer Trim Temperature Guide.

#### K-1.1) HSN

ITEM	QTY	DESCRIPTION	MATERIAL	P/N 41270H-3
3	1	ELEMENT	80 DURO HSN	40570512H
16	1	232 O-RING	90 DURO HSN	90232H

REDRESS KIT (RDK)	41270050H-3
-------------------	-------------

#### K-1.2) VITON

ITEM	QTY	DESCRIPTION	MATERIAL	P/N 41270V-3
3	1	ELEMENT	80 DURO VITON	40570512V
16	1	232 O-RING	90 DURO VITON	90232V

REDRESS KIT (RDK)	41270050V-3
-------------------	-------------

### K-2) CARBIDE OPTION

ITEM	QTY	DESCRIPTION	MATERIAL	P/N 41270C-3
12	4	CARBIDE SLIP	DLMS110	40070110C



# DL SHEAR TENSION PACKER, NON-WELDED 7" X 2-7/8"

Manual No:  
DL-412-7000-1582


Revision: A


Revision Date:  
08/01/2022

Authored by: J.Anderson

Approved by: J.Johnson

## L) TECHNICAL ILLUSTRATION

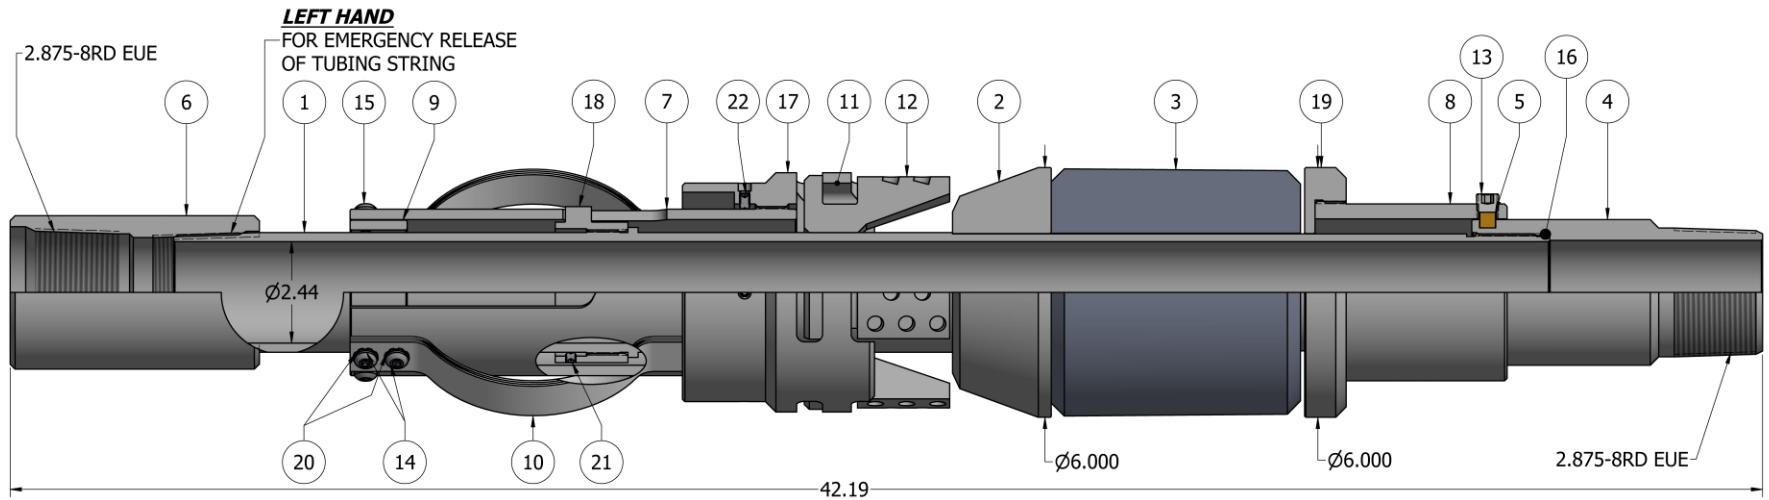

	<b>DL SHEAR TENSION PACKER, NON-WELDED</b> 7" X 2-7/8"	Manual No: <b>DL-412-7000-1582</b>
		Revision: <b>A</b>
		Revision Date: <b>08/01/2022</b>
<i>Authored by: J.Anderson</i>		<i>Approved by: J.Johnson</i>

**M) REVISION HISTORY**

DATE	REVISION	DESCRIPTION OF CHANGES	REVISED BY	APPROVED BY
08/01/2022	A	Created manual	-	-